

NDAA Compliant

VIVOTEK is committed to providing NDAA Section 889 compliant products and does not have OEM, ODM and JDM relationships with the named vendors in the NDAA.

The following VIVOTEK cameras and network video recorders (NVRs), which do not use or deploy critical components including SoCs produced by NDAA banned component vendors, are compliant with the NDAA. These products will be included in VIVOTEK's GSA contracts and are recommended for US Government applications subject to the NDAA.



Bullet Cameras

IB9360-H/80-H

2MP/5MP, H.265, ~98ft IR, SNV, WDR Pro

- 30 fps @ 1920x1080/ 20 fps @ 2560x1920
- 3.6 mm, fixed-focal, fixed iris
- Built-in IR illuminators up to ~98 feet
- Weather-proof IP66 and vandal-proof IK10-rated housing



IB9365-HT-A/EHT-A

2MP, H.265, ~328/164 ft IR, SNV, WDR Pro

- 60 fps @ 1920x1080
- 12~40 mm/ 4~9 mm, motorized, vari-focal, remote focus, P-iris lens
- Built-in IR illuminators up to ~164-328/~164 feet
- Smart IR II technology to avoid overexposure



IB9387-HT-A/EHT-A

5MP, H.265, ~164ft IR, WDR Pro, SNV

- 30 fps @ 2560x1920, 60 fps @ 1920x1080
- 2.7~13.5 mm, motorized, vari-focal, remote focus, P-iris lens
- Built-in IR illuminators up to ~164 feet
- Smart IR II technology to avoid overexposure



IB9368-HT/IB9388-HT

2MP/5MP, H.265, ~98ft IR, WDR Pro, SNV

- 30 fps @ 1920x1080/ 20 fps @ 2560x1920
- 2.8~12 mm, motorized, vari-focal, remote focus, P-iris lens
- Built-in IR illuminators up to ~98 feet
- Smart Stream III to optimize bandwidth



Fixed Dome Cameras

FD816CA-HF2

2MP, H.264, WDR Pro, SNV, Recessed Mount

- 30 fps @ 1920x1080
- 70° tilt lens
- Real-time H.264, MJPEG compression
- 2.8~12 mm, motorized, vari-focal, remote focus, P-iris lens



FD9165-HT-A

2MP, H.265, ~164ft IR, SNV, WDR Pro

- 60 fps @ 1920x1080
- 4~9 mm, motorized, vari-focal, remote focus, P-iris lens
- Built-in IR illuminators up to ~164 feet
- Smart IR II technology to avoid overexposure



FD9166-HN

2MP, H.265, ~33ft IR, WDR Pro, Compact

- 30 fps @ 1920x1080
- Built-in 940nm invisible IR illuminators up to ~33 feet
- 2.8/3.6mm, fixed-focal, fixed iris
- Video rotation for corridor scenario



FD9187-HT-A

5MP, H.265, ~164ft IR, WDR Pro, SNV

- 30 fps @ 2560x1920, 60 fps @ 1920x1080
- 2.7~13.5 mm, motorized, vari-focal, remote focus, P-iris lens
- Built-in IR illuminators up to ~164 feet
- Built-in PIR sensor for human detection



FD9360-HF2/80-HF2

2MP/5MP, H.265, ~98ft IR, WDR Pro, SNV

- 30 fps @ 1920x1080/ 20 fps @ 2560x1920
- 2.8mm, fixed-focal, fixed iris
- Built-in IR illuminators up to ~98 feet
- Weather-proof IP66-rated and vandal-proof IK10-rated housing



FD9365-HTV-A/EHTV-A

2MP, H.265, ~164ft IR, SNV, WDR Pro

- 60 fps @ 1920x1080
- 4~9 mm, motorized, vari-focal, remote focus, P-iris lens
- Built-in IR illuminators up to ~164 ft
- Smart Stream III to optimize bandwidth



FD9366-HV

2MP, H.265, ~66ft IR, WDR Pro, IP67, IK10

- 30 fps @ 1920x1080
- 2.8 mm, fixed-focal, fixed iris
- Built-in IR illuminators up to ~66 feet
- 3D Noise Reduction for low-light conditions
- Video rotation for corridor scenario



FD9368-HTV

2MP, H.265, ~98ft IR, SNV, WDR Pro

- 30 fps @ 1920x1080
- 2.8~12 mm, motorized, vari-focal, remote focus, P-iris lens
- Built-in IR illuminators up to ~98 feet
- Built-in microphone



FD9387-HTV-A/EHTV-A

5MP, H.265, ~164ft IR, WDR Pro, SNV

- 30 fps @ 2560x1920, 60 fps @ 1920x1080
- Built-in IR illuminators up to ~164 feet
- 2.7~13.5 mm, motorized, vari-focal, remote focus, P-iris lens
- Smart Stream III to optimize bandwidth



FD9388-HTV

5MP, H.265, ~98ft IR, SNV, WDR Pro

- 20 fps @ 2560x1920
- Built-in IR illuminators up to ~98 feet
- 2.8~12 mm, motorized, vari-focal, remote focus, P-iris lens
- Built-in microphone



FD9392-EHTV-O

8MP, H.265, ~164ft IR, Edge AI, Driven by OSSA

- 30 fps @ 3840x2160
- Built-in IR illuminators up to ~164 feet
- Powerful SoC with a built-in AI engine
- Supports a variety of VCA solutions through S&ST APPs



IT9360-HF2/IT9380-HF2

2MP/5MP, H.265, ~98ft IR, WDR Pro, SNV

- 30 fps @ 1920x1080/ 20 fps @ 2560x1920
- Built-in IR illuminators up to ~98 feet
- 2.8 mm, fixed-focal, fixed iris
- Built-in microphone
- Smart Stream III to optimize bandwidth



IT9388-HT

5MP, H.265, ~98ft IR, WDR Pro, SNV

- 20 fps @ 2560x1920
- 2.8~12 mm, motorized, vari-focal, remote focus, fixed iris
- Built-in IR Illuminators up to ~98 feet
- Built-in microphone



180°/360° Cameras

CC9380-HV

5MP CMOS Sensor, WDR Pro, SNV, IP66, IK10

- 20 fps @ 2560x1920, 30 fps @ 2560x1920
- 180° horizontal panoramic view
- 3D Noise Reduction for low-light conditions
- Built-in microphone
- Anti-ligature design



CC9381-HV

5MP, H.265, ~49ft IR, WDR Pro, SNV, IP66, IK10

- 20 fps @ 2560x1920, 30 fps @ 2560x1920
- 180° horizontal panoramic view
- 180° IR illuminators up to ~49 feet
- ±25° tilt lens
- Built-in microphone



FE8182

5MP CMOS Sensor, PoE, Recessed Mount

- 15 fps @ 1920x1920
- Fisheye lens for 180° panoramic view and 360° surround view
- Real-time H.264 and MJPEG compression
- 3D Noise Reduction for low-light conditions



FE9380-HV

5MP, H.265, ~33ft IR, WDR Pro, IP66, IK10

- 30 fps @ 1920x1920
- Built-in IR Illuminators up to ~33 feet
- Built-in microphone
- Local dewarping
- Smart Stream III to optimize bandwidth



FE9382-EHV-v2

6MP, H.265, ~66ft IR, WDR Pro, IP66, IK10

- 30 fps @ 2048x2048
- 360° IR illuminators up to ~66 feet with Smart IR II technology
- Built-in microphone
- Smart Stream III to optimize bandwidth



Free-of-charge Smart VCA package:



=
Face
Detection



Intrusion
Detection



Line
Crossing
Detection



Loitering
Detection



Missing
Object
Detection



Unattended
Object
Detection



Crowd
Detection



Running
Detection



= Free-of-charge
Smart Motion
Detection

Wireless Cameras

IP8160-W

2MP, ~26ft IR, AEC, WiFi, Compact

- 30 fps @ 1920x1080
- Built-in IR Illuminators up to ~26 feet
- Built-in microphone and speaker for two-way audio
- Acoustic Echo Cancellation (AEC)



IB8360-W

2MP, ~39ft IR, SNV, IP66, WiFi, Compact

- 30 fps @ 1920x1080
- Built-in IR Illuminators up to ~39 feet
- Smart IR technology to avoid overexposure
- Smart Stream II to optimize bandwidth
- Weather-proof IP66-rated housing



Box Cameras

IP9164-HT

2MP, H.265, WDR Pro, SNV, RBF, i-CS



- 60 fps @ 1920x1080
- Smart Stream III to optimize bandwidth
- i-CS (intelligent-CS) lens supported
- Video rotation for corridor view
- EIS to control image stability

IP9164-LPC

2MP, H.265, WDR Pro, SNV, RBF, i-CS



- 60 fps @ 1920x1080
- Covers both scene overview and LPC view
- Supreme anti-glare capability by headlight filter design
- EIS to control image stability

Mobile Dome Cameras

MD9560-H

2MP, H.265, ~66ft IR, WDR Pro, EN50155



- 30 fps @ 1920x1080
- Built-in IR Illuminators up to ~66 feet
- Fast AE for quick adaptation to light changes
- Video rotation for corridor scenario
- Built-in 802.3af compliant PoE

NVR

NR9682-v2/782-v2

H.265 64/128-CH 16Bay NVR



- H.265/H.264 compression technology
- Up to 64/128-CH recording, 64-CH display
- Support HDMI, display port, DVI simultaneous output
- 16 hot-swappable HDD bays
- Support RAID 0/1/5/6/10 storage
- Smart Search II, Smart VCA Event Search

NS9521

H.265 Desktop 32-CH VAST 2 Station



- H.265/H.264 compression technology
- 32-CH, expandable up to 64-CH
- Support HDMI, display port, and DVI simultaneous output
- 2 hot-swappable HDD bays
- VIVOTEK VAST 2 CMS inside
- Slim design and easy HDD installation

AI Box

IE9111-O

Edge AI Device, Driven by OSSA, S&ST OS, VCA



- Powered by Qualcomm QCS605 SoC with built-in AI Engine
- Enables any type of network camera to act as an IoT Device
- RJ-45 or M12 connectors for PoE connection

Application

SC8131

Stereo Counting Network Camera



- VIVOTEK's 3D Depth Technology
- High accuracy rate up to 98%
- Local storage data for counting report
- Easy installation and configuration
- Seamless counting with VAST CMS

Managed PoE Switch

AW-GEV-104B-130

8xGE PoE + 2xGE SFP Web Smart Managed



AW-GEV-107A-130

8xGE PoE + 2xGE Combo + 1xRJ45 Console



AW-GEV-184B-250

16xGE PoE + 2xGE SFP Web Smart Managed



AW-GEV-264B-370

24xGE PoE + 2xGE SFP Web Smart Managed



AW-GEV-267A-370

24xGE PoE + 2xGE Combo + 1xRJ45 Console



AW-GTS-287A

20xGE SFP + 4xCombo GE + 4x10G SFP+ Layer 2+ Plus



- Auto discovery and classification of network devices
- Batch camera configuration- file import/export
- Batch camera network/login configuration
- Display IP camera live stream in topology view, floor view and Google Map view

- Auto generated surveillance, easy tag VLAN configuration and smart device management in topology view
- Device status page to show the real-time verification result of each connection

PoE Injector


AP-GIC-011A-060

Indoor 1xGE 60W High Power UPoE Injector



AP-GIC-011A-095

Indoor 1xGE 95W High Power PoH/PoE Injector

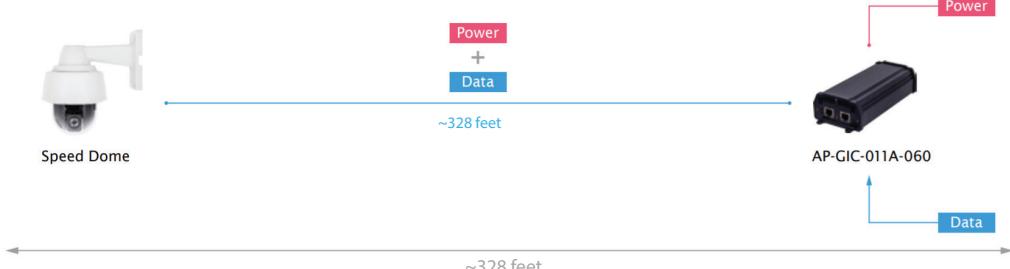


AP-GIC-015B-095

Outdoor 1xGE 95W PoH/PoE Injector with Adaptor



AW-GEV-267A-370

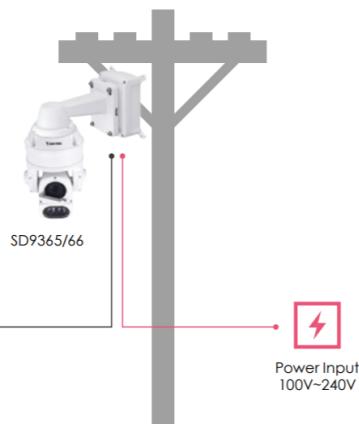

Industrial Products


AW-IHH-0800

Industrial 4xGE 95W PoH/PoE + 2xGE UTP + 2xGE SFP Switch




AW-IHS-0202

Industrial 1xFE + 1xFE SFP Media Converter

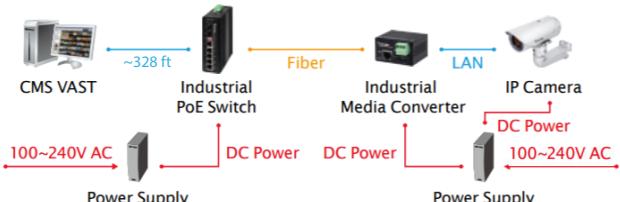


AW-IHT-0100

Industrial 1xFE PoE Injector

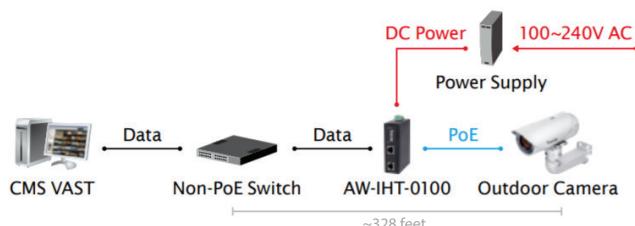


AW-IHT-0601

Industrial 4xGE PoE + 1xFE Combo + 1xFE SFP Switch

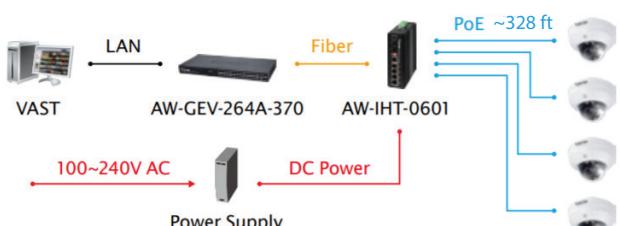

AW-IHT-0602

Industrial EN50155 4xFE M12 PoE + 2xFE M12 Switch

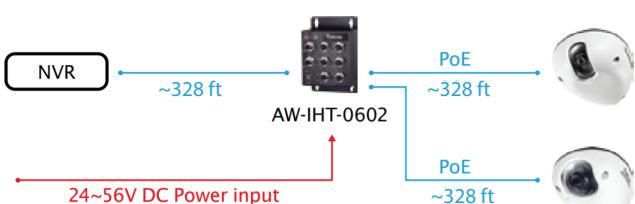

AW-IHT-0800

Industrial 4xGE PoE + 2xGE UTP + 2xGE SFP Switch



AW-IHT-1271

Industrial VivoCam L2+ 8xGE PoE + 4xGE SFP Managed PoE Switch



PoE Extender


AP-FXC-0110

Indoor 1-Port FE 95/60/30W PoE Extender




AP-FXC-0210

Indoor 2-Port FE 95/60/30W PoE Extender

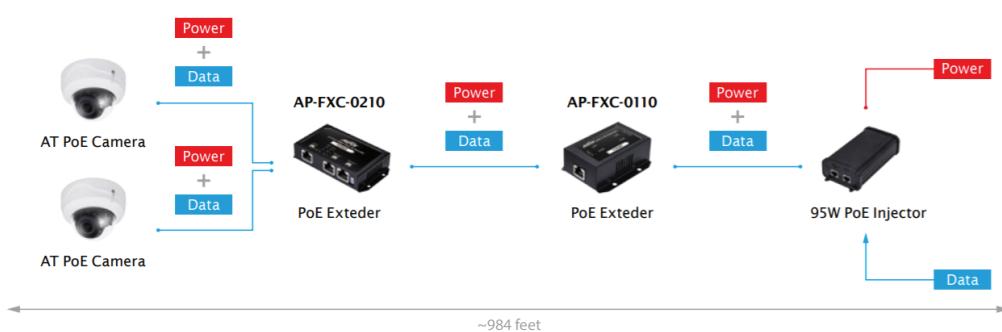


AP-FXC-0160

Outdoor 1-Port FE 95/60/30W PoE Extender

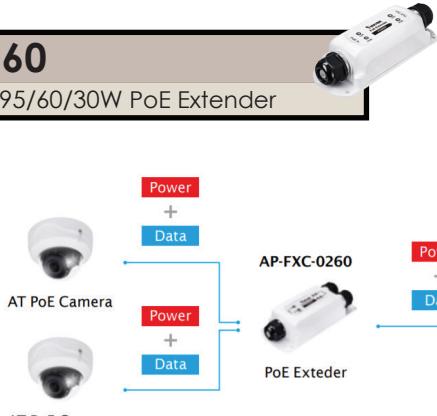

AP-FXC-0260

Outdoor 2-Port FE PoE Extender

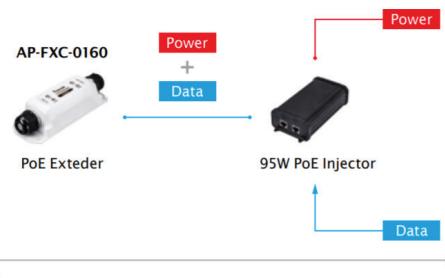

AP-FHP-0100-R

1 Port Hyper PoE Rx Module, PoE input




AP-FHP-0105-R


1 Port Hyper PoE Rx Module




Daisy Chain

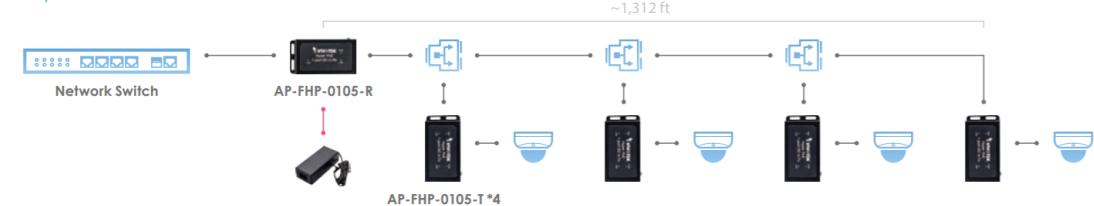


Ring

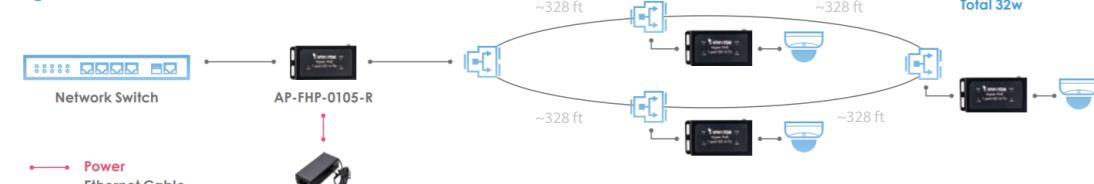

DC input

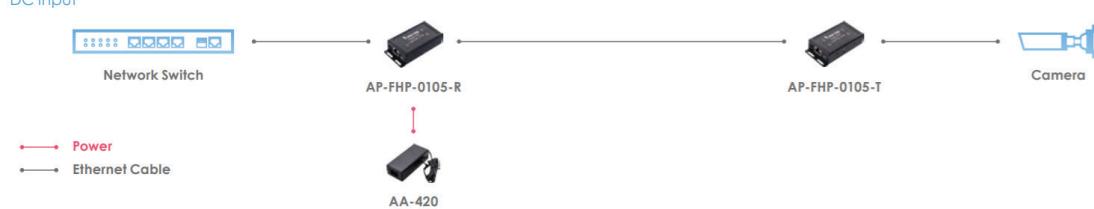


PoE input

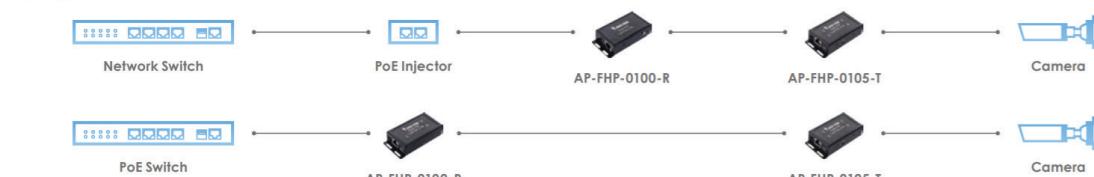

Outdoor PoE Switch

AW-GET-083A-120

Indoor 1-Port FE 95/60/30W PoE Extender

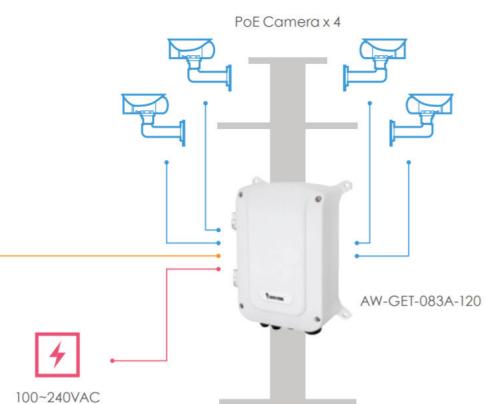

EPoC

AP-FEX-0100-R

1 Port EPoC PoE in Rx Module



AP-FEX-0105-R

1 Port EPoC Rx Module



AP-FEX-0105-T

1 Port EPoC Tx Module



AP-FEX-0150-T

Outdoor 1 Port EPoC Tx Module



AP-FEX-0200-T

2 Ports EPoC Tx Module



AP-FEX-0250-T


Outdoor 2 Port EPoC Tx Module



Daisy Chain



Ring

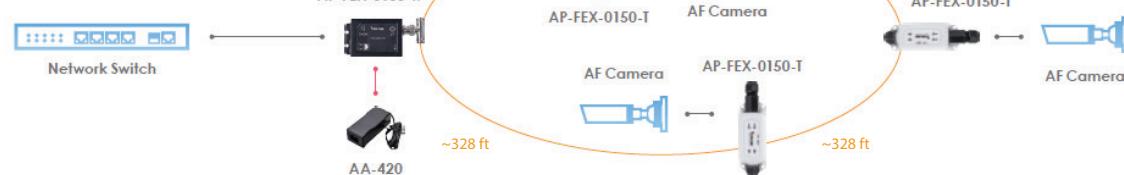

DC input



PoE input

